








R-4

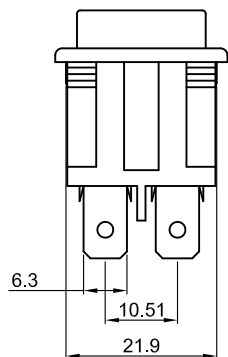


Rating: 16A 125V AC (UL CUL)
 16A 250V AC (UL CUL VDE ENEC CB CQC)
 Contact Resistance: 50m Ω (Max)
 Insulation Resistance: DC 500V 100M Ω (Min)
 Dielectric Strength: AC1500V 1 minute
 Electrical life: 10,000 cycles
 Operating Temperature: 0°C~85°C
 Safety Approval:



CUT-OUT



	X	Y
0.75~1.25	28.0+0.10	22.0+0.10
1.25~2.00	28.2+0.10	22.0+0.10
2.00~3.00	28.4+0.10	22.0+0.10



MATERIAL:

Body:Nylon66,UL rated:94V-2 min
 Actuator:PC/Nylon66,UL rated:94V-2 min
 Terminal:Brass with silver-plate

				公差 TOLEANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2020.12.21	品名 TITLE	图号 DRAWING NO
A2	触点改成银氧化锡	2020.12.21	N/A	核准		核对		绘图		R-4-210-C5L-BG	R-4-210-C5L-BG_A2
A1	重新整理发行	2014.07.04	N/A	核 准		核 对		绘 图			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY			